




成型尺寸: 65x104mm


128g双铜纸, 印4C, 表面过光油, 折页



VP2
Smart Power Strip








Product Overview:

VP2 Smart Power Strip can be controlled through Wi-Fi wireless network. You can switch on/off outlet and monitor its status wirelessly.

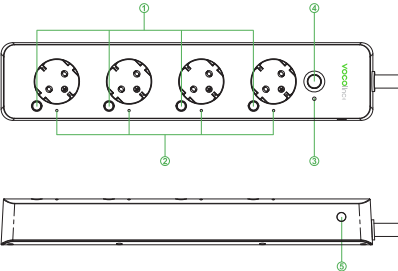

1	Power Key	
2	Power Status LED	
3	WiFi Status LED	
4	Reset Key	Tap: Switching all outlets on/off simultaneously Press & hold for about 10 seconds: factory reset. All connection data will be cleared. Must remove VP2 Smart Power Strip from the app and then add it back.
5	Overload Protection Switch	When loads hit the maximum capacity, overload protection will cut off power supply. Manually pressing the switch can recover the power supply.

What's Included:

- VP2 Smart Power Strip
- Quick Start Guide

Features:

- Smart AC outlet
- Works with Apple HomeKit
- Works with Amazon Alexa
- Works with the Google Assistant

System Requirement:

- Mobile device running iOS12.0 or later
- Existing Wi-Fi network
- Stable Internet


Electrical Ratings


Input: AC230V, 50Hz
Output: AC230V, 10A Max, 2300W (Pure Resistive Load)


General use ONLY
Indoor dry location use ONLY

LED Status Indication

Status	LED Indication
Search Wi-Fi	Green Flashing fastly
Adding a device	Green Flashing slowly
A device added Successfully	Red Flashing slowly 5 times
Discovering a device	Red flashing slowly 5 times
Connected to Wi-Fi	Green stay on
Disconnected from Wi-Fi	Red flashing fastly
Reset	Press & Hold for 10s, then green flashing fastly
OTA in Progress	Red Flash slowly
OTA done	Red flashing slowly 4 times







Setup code
Code de Configuration

Safety Warnings

- Plug directly into electric outlet (not into extension cord)
- For indoor use only
- Unplug from outlet before cleaning
- DO NOT clean with liquid
- DO NOT remove ground pin (round pin) as there is risk of electric shock
- DO NOT use in wet or damp areas
- Keep children away from Power Strip
- DO NOT exceed the recommended electrical ratings
- DO NOT use in precision timing applications where inaccurate timing could be dangerous (sunlamps, saunas, etc.)
- DO NOT use with devices that should not be operated unattended.
- After switching off the main power, DO NOT operate until the main power indicator goes completely off (about 2 seconds delay)
- DO NOT use the device when the casing is broken

Quick Start Guide

For iOS user

Before starting, make sure your device is connected to Internet stably.

1. Download and open the free VOCOLinc LinkWise app from the Apple App Store.
2. Plug VP2 Smart Power Strip into a desired outlet. Press & Hold the Reset Button for about 10 seconds. Once the LED indicator starts blinking green, it is ready for network setup.
3. Make sure your iPhone or iPad (version 12.0 or later) is connected to a 2.4GHz Wi-Fi network. If you are connected to a 5GHz Wi-Fi network, use the router utility software to turn it off during setup.
4. Tap "+" on the top left corner and follow the on-screen directions to complete network setup.
Note: To add more devices please repeat VP2 SmartPower Strip setup process; re-add the accessory please factory reset first.
5. You can assign a name to your device and use this name when speaking to Siri. For example, if you name your device "printer", you may wake up Siri and say "Turn on the Printer".
6. Setup customized scenes to control multiple devices with a single command. For example, if you name the scene that turns off all the lights "I'm going to bed", when you wake up Siri and say "I'm going to bed", it will do the job.
The use of a HomeKit-enabled accessory need the follow permissions:
Settings > iCloud > iCloud Drive > Turn On

Settings > iCloud > Keychain > Turn On
Settings > Privacy > HomeKit > LinkWise > Turn On